


**SPECIFICATION OF THERMOELECTRIC MODULE Drift-1.05**


<i>Thermoelectrical parameters</i>	<i>Unit</i>	<i>Value</i>
<b>I<sub>max</sub></b>	<b>Amps</b>	<b>8.6</b>
<b>U<sub>max</sub></b>	<b>Volts</b>	<b>24.6</b>
<b>ΔT<sub>max</sub></b>	<b>K</b>	<b>69</b>
<b>Q<sub>max</sub></b>	<b>Watts</b>	<b>131.0</b>
<b>R<sub>ac</sub> (at 295 K)</b>	<b>Ohm</b>	<b>2.15</b>
<b>Tolerance</b>	<b>%</b>	<b>±10</b>
<i>All parameters except R<sub>ac</sub> are given at Th=300 K</i>		

<i>Assembly parameters</i>	<i>Unit</i>	<i>Value</i>
<b>Wires</b>	<b>HB-0.35 4 600</b>	
<b>Cross section</b>	<b>mm<sup>2</sup></b>	<b>035</b>
<b>Metallization</b>	<b>Not</b>	
<b>Sealing</b>	<b>Not</b>	
<b>Internal solder</b>	<b>°C</b>	<b>139</b>
<b>Brazing solder</b>	<b>°C</b>	<b>Not</b>

<i>Operational parameters</i>	<i>Unit</i>	<i>Value</i>
<b>Working temperature range</b>	<b>°C</b>	<b>-50 ÷ +80</b>
<b>Max. processing temperature</b>	<b>°C</b>	<b>130</b>
<b>ROHS compliance</b>		<b>YES</b>

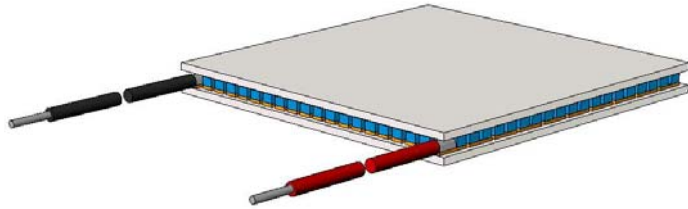