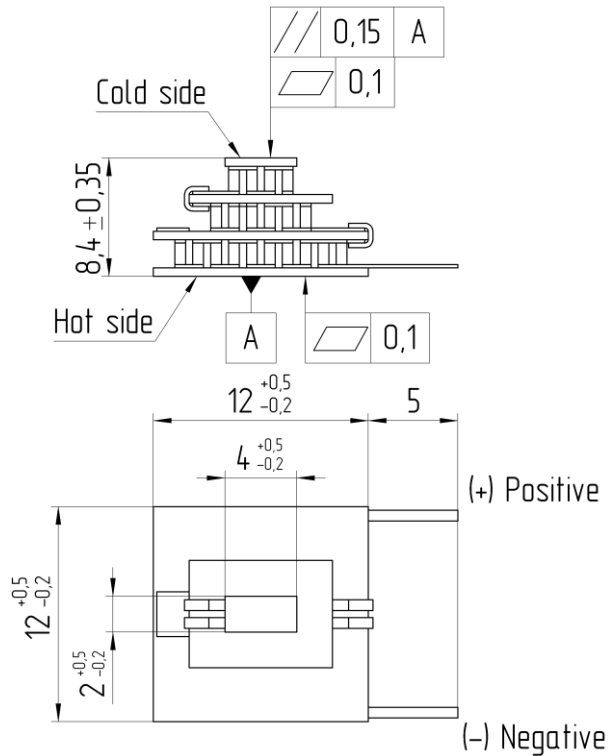
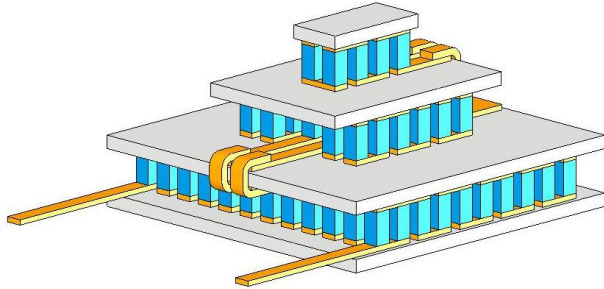


**SPECIFICATION OF THERMOELECTRIC MODULE TB-3-(59-17-4)-1.2**


Thermoelectric parameters	Unit	Value
<b>I<sub>max</sub></b>	<b>A</b>	<b>1.2</b>
<b>U<sub>max</sub></b>	<b>V</b>	<b>6.8</b>
<b>ΔT<sub>max</sub></b>	<b>K</b>	<b>113</b>
<b>Q<sub>max</sub></b>	<b>W</b>	<b>0.6</b>
<b>R<sub>ac</sub> (at 295 K)</b>	<b>Ohm</b>	<b>5.8</b>
<b>Tolerance</b>	<b>%</b>	<b>±10</b>

*All parameters except R<sub>ac</sub> are given at Th=300 K*

Assembly parameters	Unit	Value
<b>Wires</b>		<b>-</b>
<b>Cross section</b>	<b>mm<sup>2</sup></b>	<b>-</b>
<b>Metallization</b>		<b>Not</b>
<b>Sealing</b>		<b>Not</b>
<b>Internal solder</b>	<b>°C</b>	<b>139</b>
<b>Brazing solder</b>	<b>°C</b>	<b>not</b>

Operation parameters	Unit	Value
<b>Working temperature range</b>	<b>°C</b>	<b>-50 ÷ +80</b>
<b>Max. processing temperature</b>	<b>°C</b>	<b>120</b>
<b>ROHS compliance</b>		<b>YES</b>

