
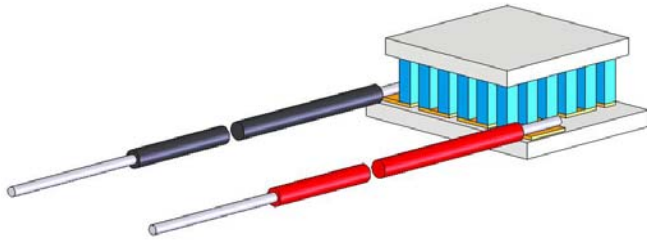



SPECIFICATION OF THERMOELECTRIC MODULE TB-18-0.45-1.3


Thermoelectrical parameters	Unit	Value
I_{max}	Amps	0.7
U_{max}	Volts	2.2
ΔT_{max}	K	67
Q_{max}	Watts	0.9
R_{ac} (at 295 K)	Ohm	2.8
Tolerance	%	±10

All parameters except R_{ac} are given at Th=300 K

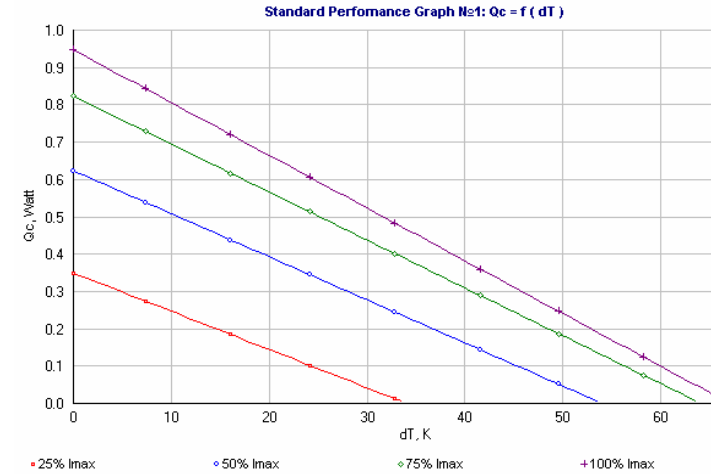

Assembly parameters	Unit	Value
Wires		HB-0.20 4 600
Cross section	mm ²	0.20
Metallization		Not
Sealing		Not
Internal solder	°C	139
Brazing solder	°C	not

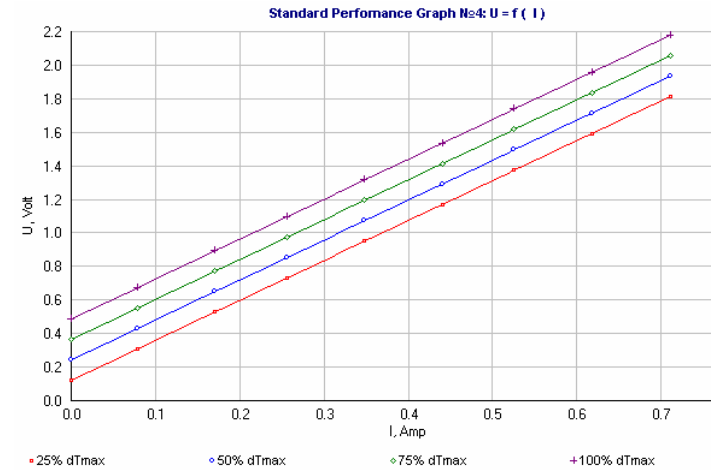

Operational parameters	Unit	Value
Working temperature range	°C	-50 ÷ +80
Max. processing temperature	°C	130
ROHS compliance		YES

